


J					
Pole	Colour	Sec.	Cable	Cross	Function
1	BLACK	1.5		S1	GND
4	BLUE	0.50	CV7	7/2	
5	GREEN	0.5	CV2	2/2	
8	BLACK	0.75	CV5	5/2	
9	RED	0.75	CV5	5/1	
10	BLACK	0.75	CV4	4/2	
11	RED	0.75	CV4	4/1	
13	RED	0.75	CV11	11/1	
15	RED	1.5		S2	15/54
16	BROWN	0.50	CV10	10/3	
17	BROWN	0.50	CV7	7/1	
18	RED	0.5	CV2	2/3	
19	RED	0.5	CV12	12/3	
21	GREEN	0.50	CV_CAN	CAN/4	CAN_L
24	GREEN	0.5	CV12	12/2	
27	BLUE	0.50	CV10	10/1	
28	RED	1.5	CV1	1/1	
29	BLACK	1.5	CV1	1/2	
32	BLACK	0.5	CV2	2/1	
33	BLACK	0.5	CV12	12/1	
35	YELLOW	0.50	CV_CAN	CAN/2	CAN_H

S1 GND					
Pole	Col.	Sec.	Cable	Cross	Function
-	BLACK	1	CV_CAN	CAN/3	GND CAN_BUS
	BLACK	1.5		J/1	GND
	BLACK	0.75	CV11	11/2	GND
	BLACK	1	CV_15/54	3/2	GND

S2 15/54					
Pole	Col.	Sec.	Cable	Cross	Function
-	RED	1	CV_CAN	CAN/1	15/54 CAN_BUS
	RED	1.5		J/15	15/54
	RED	1	CV_15/54	3/1	15/54

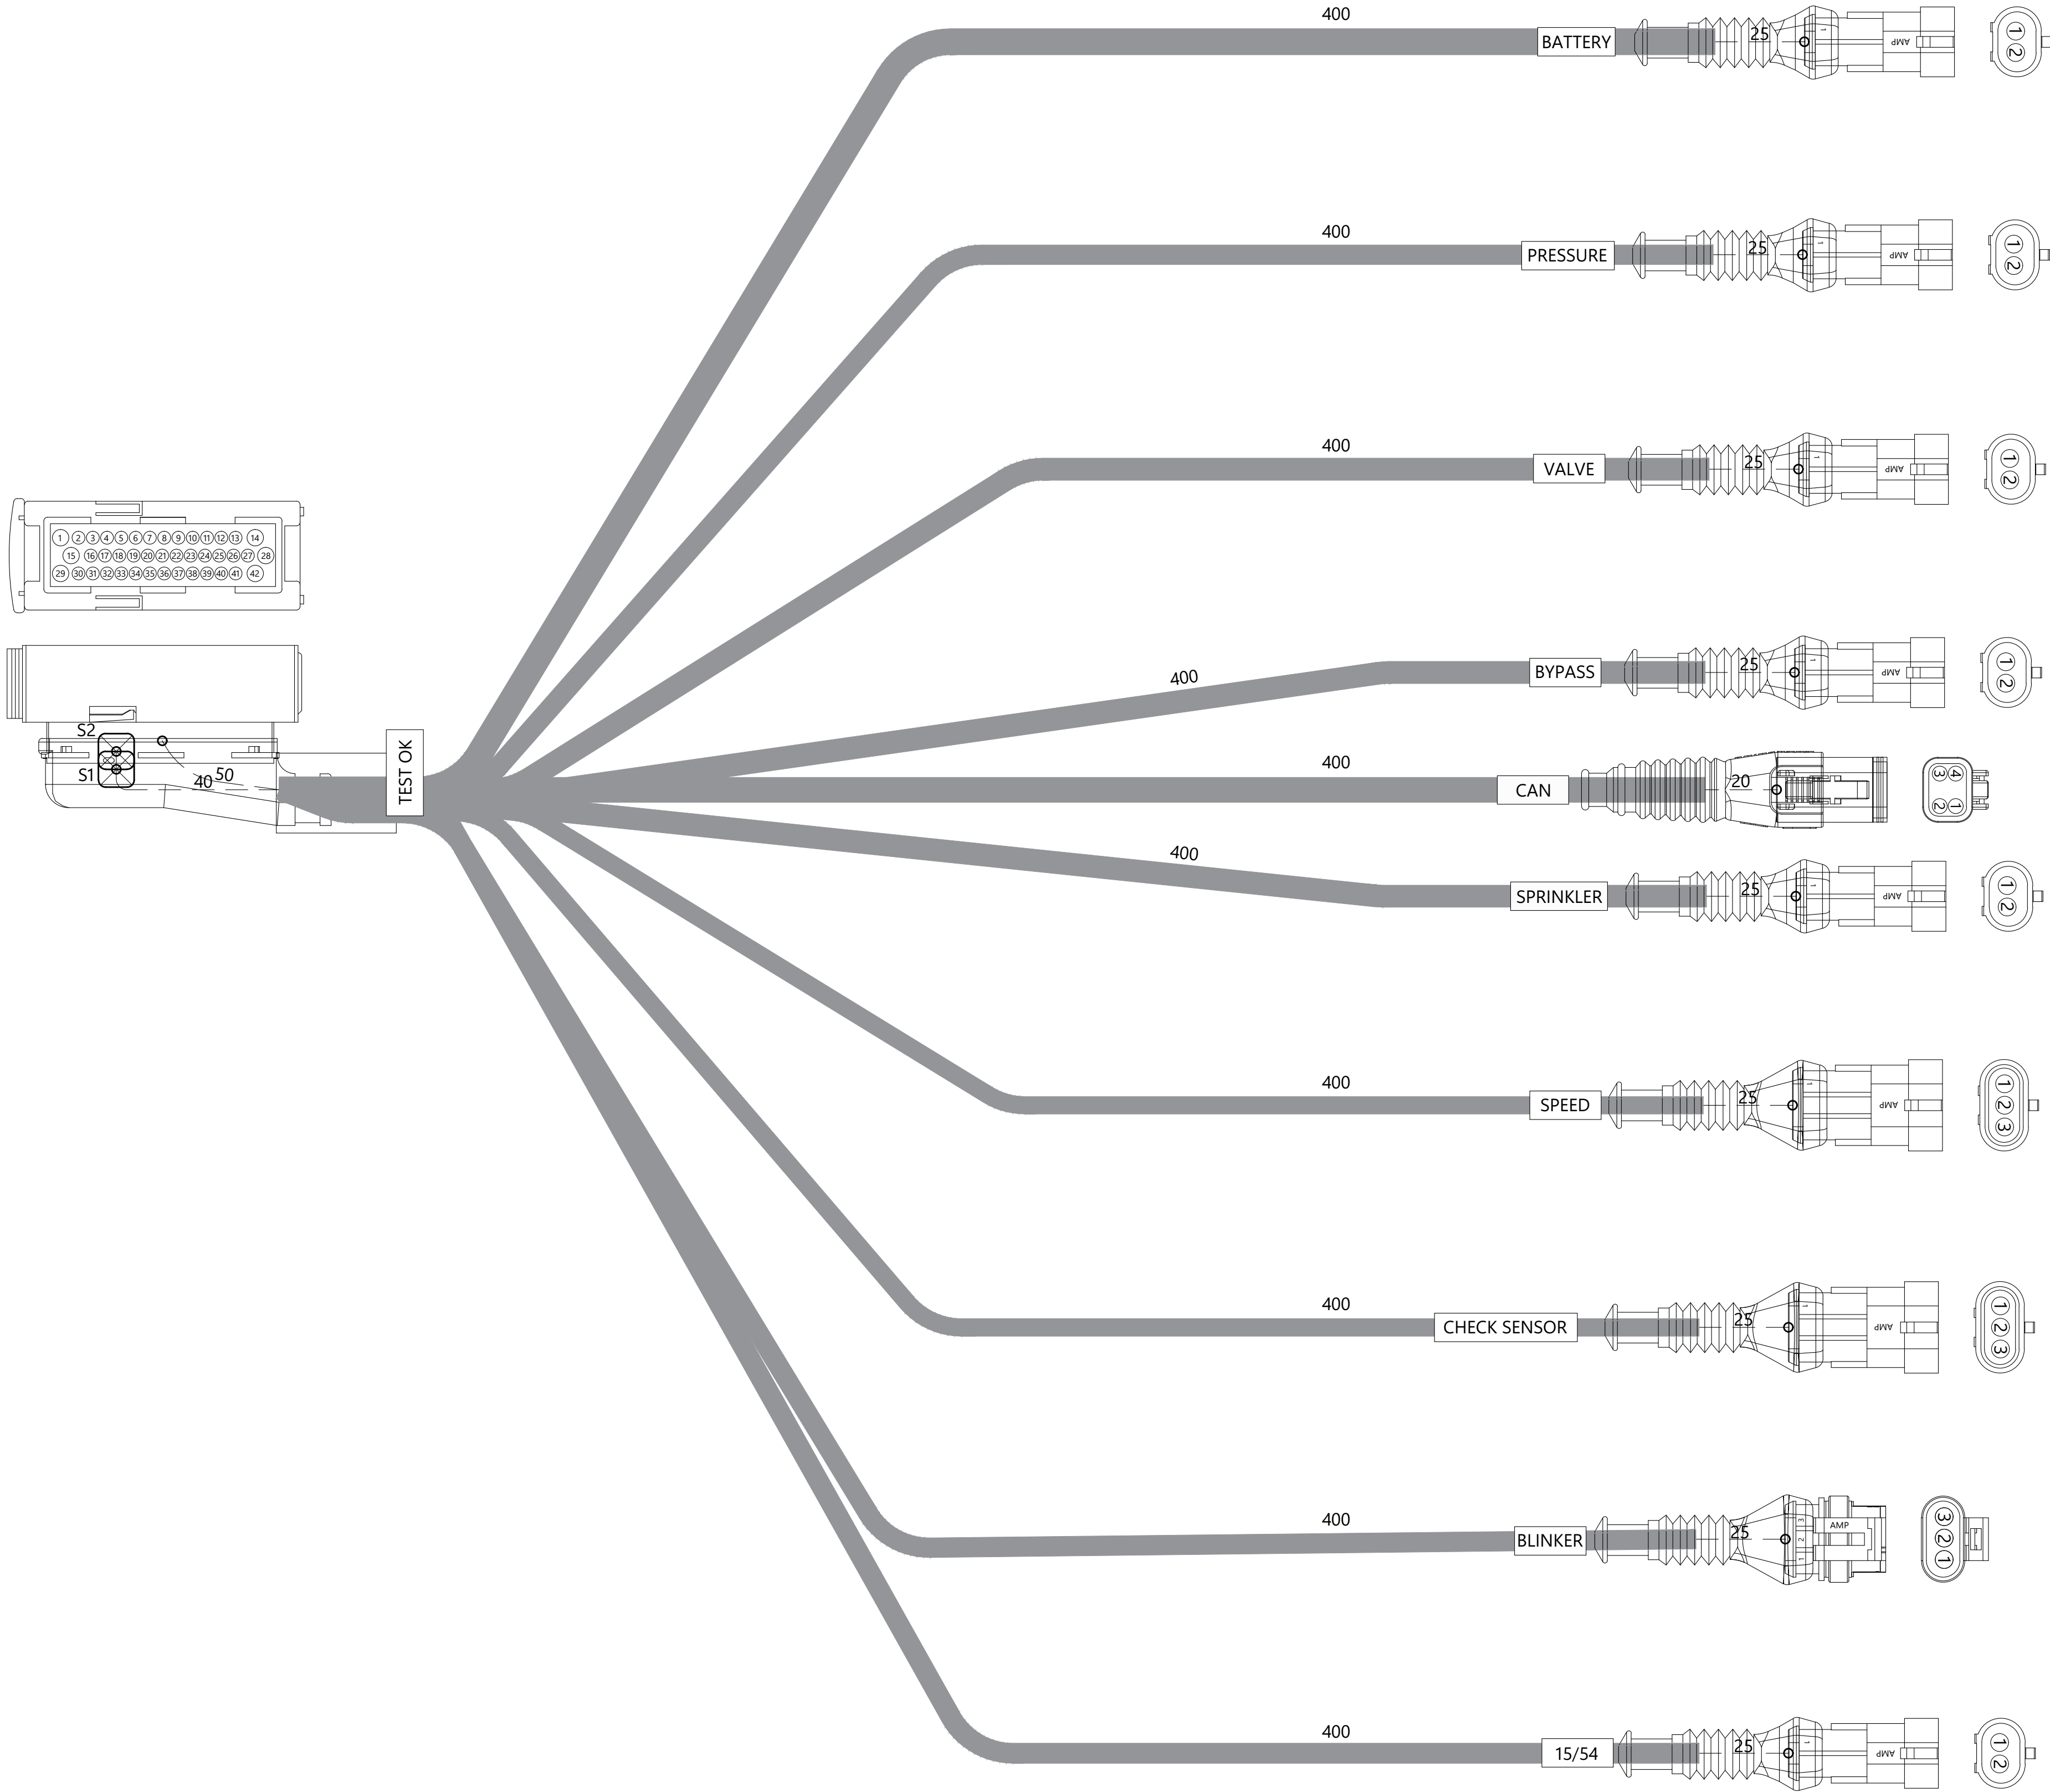

BATTERY				
Pole	Col.	Sec.	Cable	Cross
1	RED	1.5	CV1	J/28
2	BLACK	1.5	CV1	J/29

PRESSURE				
Pole	Col.	Sec.	Cable	Cross
1	BROWN	0.50	CV7	J/17
2	BLUE	0.50	CV7	J/4

VALVE				
Pole	Col.	Sec.	Cable	Cross
1	RED	0.75	CV5	J/9
2	BLACK	0.75	CV5	J/8

BYPASS				
Pole	Col.	Sec.	Cable	Cross
1	RED	0.75	CV4	J/11
2	BLACK	0.75	CV4	J/10

CAN					
Pole	Col.	Sec.	Cable	Cross	Function
1	RED	1	CV_CAN	S2	15/54 CAN BUS
2	YELLOW	0.50	CV_CAN	J/35	CAN H
3	BLACK	1	CV_CAN	S1	GND CAN BUS
4	GREEN	0.50	CV_CAN	J/21	CAN L

SPRINKLER					
Pole	Col.	Sec.	Cable	Cross	Function
1	RED	0.75	CV11	J/13	
2	BLACK	0.75	CV11	S1	GND

SPEED				
Pole	Col.	Sec.	Cable	Cross
1	BLACK	0.5	CV2	J/32
2	GREEN	0.5	CV2	J/5
3	RED	0.5	CV2	J/18

CHECK SENSOR				
Pole	Col.	Sec.	Cable	Cross
1	BLACK	0.5	CV12	J/33
2	GREEN	0.5	CV12	J/24
3	RED	0.5	CV12	J/19

BLINKER				
Pole	Col.	Sec.	Cable	Cross
1	BLUE	0.50	CV10	J/27
3	BROWN	0.50	CV10	J/16

15/54					
Pole	Col.	Sec.	Cable	Cross	Function
1	RED	1	CV_15/54	S2	15/54
2	BLACK	1	CV_15/54	S1	GND